


# STRETCH FILM

**Stretch films**, our advanced technology produces polyethylene stretch film that protects products during transportation or storage by shielding against external factors such as dirt, dust, and impact. Our products come in various sizes and colors and are lightweight, reducing costs. With a multiple coefficient of elongation and resistance.

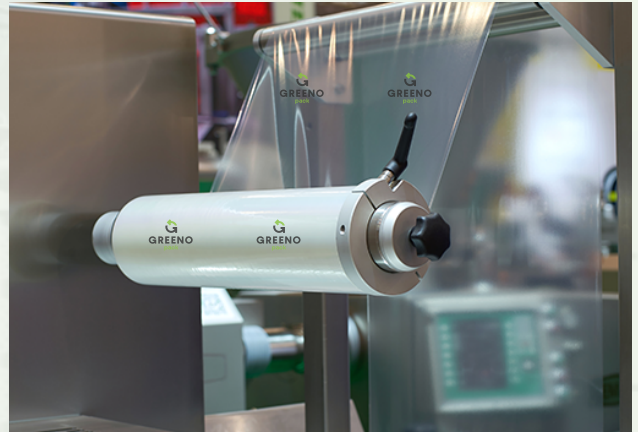

## Characteristics

- It is made of Recyclable LDPE material with Coex technology.
- UV protection and antistatic additives can be applied.
- It can be produced in the desired color.
- It is an economical and safe protector. It is a product designed to increase efficiency.
- It is used in automatic and hand warping. It isolates your products from the external environment.
- Roll weight (3 kg, 5 kg, for Hand roll, 16 kg, 50kg for Machine roll).
- It provides optimum protection against dust, dirt and moisture and is also ideal for outdoor storage.
- High tear puncture resistance, high holding force ensures stable load securing throughout the entire logistics chain, from loading and transport to the end-user.
- Appropriate film thickness from 10 microns to 30+ microns and recipes are prepared according to customer need.

## Usage

- Stretch film is generally used for any packaging that requires protection and stability during transportation and storing etc...

# CONTACT US

- **United Arab Emirates**

Abu Dhabi – Saeed Bin Ahmed Al Otaiba St – Al Massoud Building –  
Suite 1801 , 18th Floor , P.O. Box : 26010  
+971 2 627 7751  
[info@afi-intl.com](mailto:info@afi-intl.com)

- **Egypt**

Delta Towers, El Nasr Road, Nasr City, Cairo Governorate, Egypt  
+20 223493233  
[info@afi-intl.com](mailto:info@afi-intl.com)

- **United Kingdom**

61 Bridge Street, Kingston, United Kingdom, HR5 33D  
[info@afi-intl.com](mailto:info@afi-intl.com)